

## Moulding Installation Instructions

### Important points to note:

- Leave a 6 mm (1/4 in.) expansion gap between the moulding and the laminate plank.
- If desired, mouldings can be glued to sub-floors or concrete, but should not be glued directly to the laminate plank.


### For a water resistant installation:

- Apply silicone caulking to the edge of the moulding that will come in direct contact with the laminate flooring surface.
- Install mouldings and immediately wipe away any excess silicone caulking.

### T-Moulding

T-moulding joints ensure a smooth transition between two areas of flooring of the same level (ex: ceramic and laminate). It can also be used as expansion joints every 12 m (40 feet) in length and width.

It is recommended to use t-mouldings in every doorway, as it makes installation easier.




Laminate plank with foam backer

Laminate plank with foam backer

allow 6 mm (1/4 in.) gap on each side for expansion

### Stairnose


Stairnose moulding joints provide a safe and elegant finish for stair edges and landings.

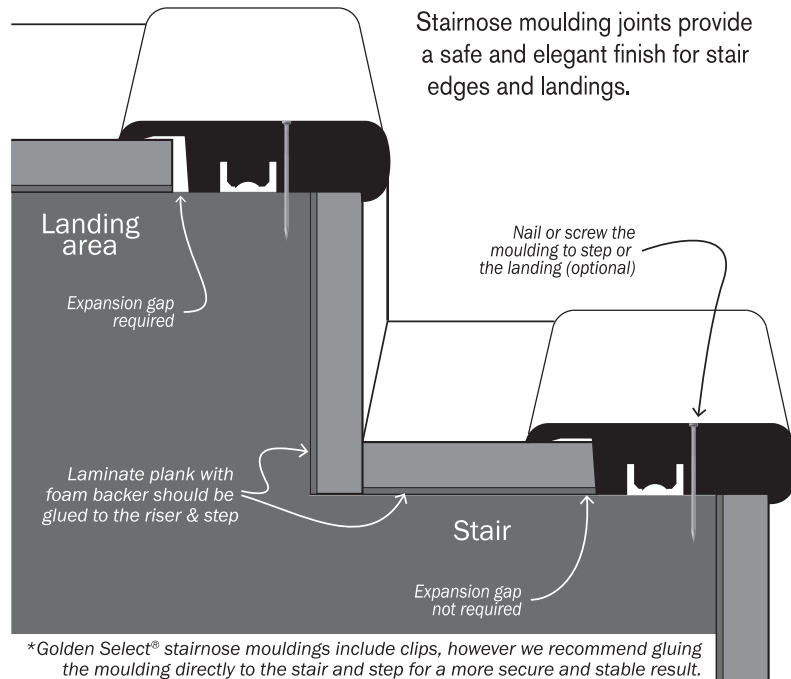

\*Golden Select® stairnose mouldings include clips, however we recommend gluing the moulding directly to the stair and step for a more secure and stable result.

### Reducer

Reducer joints are designed to ensure a natural transition from laminate flooring to a lower surface such as vinyl tiles or thin carpet.

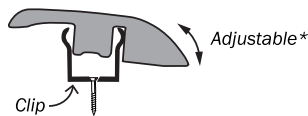


Laminate plank with foam backer

Vinyl

allow 6 mm (1/4 in.) gap on each side for expansion

### End-cap

End-cap joints ensure a perfect transition from laminate flooring to a higher surface such as ceramic tile or carpet.



Laminate plank with foam backer

Carpet

allow 6 mm (1/4 in.) gap on each side for expansion

\* Adjust the position of the moulding in the clip based on the height of the lower surface flooring