

GOLDEN SELECT™ ARTIFICIAL HEDGE PANEL INSTALLATION GUIDE

ITEM: 77HEDGE0018

PLEASE KEEP FOR FUTURE REFERENCE

TOOLS AND MATERIALS REQUIRED (NOT INCLUDED)

For wire mesh, chain link and iron fences:

- Green zip ties
- Scissors

For drywall and wood walls:

- 1/2 in x 1/2 in (1.27 cm x 1.27 cm) crown 20-gauge staples and stapler
- Scissors

For concrete and brick walls:

- 3/16 in x 1 3/4 in (0.47 cm x 4.45 cm) in washer head concrete screws and drill
- Scissors

For aluminium and metal walls:

- 3/4 in (1.90 cm) truss head self-tapping screws and drill
- Scissors

PREPARATION:

- Measure the installation area prior to beginning the installation.
- Plan the placement of each hedge panel.
- Hedge panels can be cut using scissors, or by simply detaching the hedge panels where they connect. See the image below.

INSTALLATION:

Always begin the installation at the top of the installation surface and work horizontally until a row is completed. Ensure the hedge is properly secured as you progress.

WIRE MESH, CHAIN LINK, AND IRON FENCE INSTALLATIONS

1. Hold the hedge panel in place. Use the zip ties to fasten the hedge directly to the fence.
2. Place one zip tie in each corner of a panel or approximately every 6 in (15.24 cm).
3. Continue placing zip ties to the fence and secure as needed. Cut the stray ends of zip ties once the mats have been installed.

DRYWALL AND WOOD WALL INSTALLATIONS

1. Staple the plastic mesh in the back of the panel to the wall to hold it securely in place.
2. Staple the hedge approximately every 6 in (15.24 cm).
3. Continue to staple the hedge to the drywall or wood wall and secure as needed.

CONCRETE AND BRICK WALL INSTALLATIONS

1. Hold the hedge panel in place. Drill one hole in the top left and top right corner of each panel, placing a screw at least once every 6 in (15.24 cm).
2. Secure the artificial hedge to the surface by screwing a washer head anchor in each hole on the corner of each panel.
3. Continue and secure the hedge as needed.

ALUMINUM AND METAL WALL INSTALLATIONS


1. Hold the hedge panel in place and secure a 3/4 in (1.90 cm) truss head self-tapping screw every 6 in (15.24 cm).
2. Continue and secure the hedge as needed.

INSTALLATION FOR LED LIGHTS

Golden Select™ Artificial Hedge Panel comes with 100 warm white LED lights. The lights are ETL-certified and IP44 rated and suitable for indoor and outdoor use. Each LED light comes with an adapter with a multi-mode switch, and 2 connectors (prong and receptacle).

Instructions for Individual Panels

1. Insert the prong into the adapter and screw the cap on at the back of the prong.
2. Test and inspect the lights before installing the hedge panel. Follow the instructions listed above to install the hedge panel.
3. Plug the adapter into the outlet and turn on the switch. **If you install the hedge panels outdoors, please make sure to use a covered Class A Ground Fault Circuit Interrupting (GFCI) outlet that has a weatherproof enclosure with the adapter inserted or removed. If one is not provided, contact a qualified electrician for proper installation. Do not use with outlets that are weatherproof only when the adapter is not plugged in or the outlet cover is closed.**

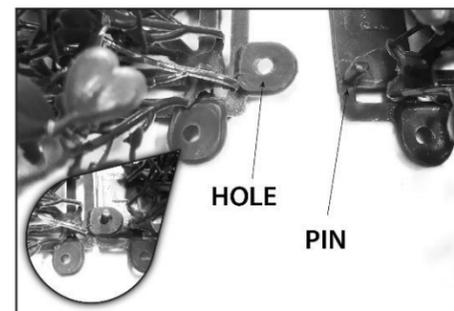

Instructions for Connecting Sets End to End (for connecting multiple products)

1. Prior to installing the hedge panels, please make sure to always unplug the adapter(s) from the power source before assembling or disassembling.
2. Lay the hedge panels on the floor and make sure the prongs are all facing one way and the receptacles the other way. Connect them by simply plugging the prongs into the receptacles and screwing the cap tight.
3. Connect a maximum of 10 hedge mats together; do not exceed 10 interconnected hedge panels with lights. If more hedge mat connections are needed, please use another outlet as a power source. Please note the brightness may dim slightly with more interconnected panels.
4. Insert the first mat's prong into the adapter and screw the cap on at the back of the prong.
5. Test and inspect the lights before installing the hedge panels. After the lights are tested, follow the instructions listed above to install the hedge panels.
6. Plug the adapter into the outlet and turn on the switch. **If you install the hedge panels outdoors, please make sure to use a covered Class A Ground Fault Circuit Interrupting (GFCI) outlet that has a weatherproof enclosure with the adapter inserted or removed. If one is not provided, contact a qualified electrician for proper installation. Do not use with outlets that are weatherproof only when the adapter is not plugged in or the outlet cover is closed.**



CAUTION

1. Always unplug the adapter(s) from the power source before assembling or disassembling.
2. This product is for use on 120 V outlets.
3. Unplug the product when leaving the house, or when retiring for the night or if left unattended.
4. This is an electrical product. To avoid the risk of fire, burns, electrical shock or personal injury, it should not be played with or placed where small children can reach it.
5. Do not use the product for purposes other than its intended use.
6. Do not mount the hedge panels near gas or electric heaters, fireplace, candles or any sources of fire or heat.
7. The lights are IP44 rated and suitable to use outdoors to a maximum of -20°C.
8. Do not hang any ornaments or objects from the cord, wire or light string.
9. Do not apply any sort of tape to any of the connections.
10. Keep the lights, cords, and connections off of the floor so they do not touch the ground.
11. Do not secure the wiring of the product with staples or nails or place the product on sharp hooks or nails.
12. Before using or reusing the hedge panels, inspect the product carefully and discard any products that have cut, damaged or frayed wire insulation or cords, cracks in the lamp holders and or enclosures, loose connections or exposed wires.
13. When storing the product, carefully remove the product from its location to avoid any undue strain and stress on the product conductors, connections, and wires.
14. When not in use, store neatly in a cool, dry location protected from sunlight.
15. The artificial hedge panels must be installed according to the instructions provided by the manufacturer for guaranteed performance and appearance.
16. Flashing lights have been known to trigger seizures in people with photosensitive epilepsy.

WARRANTY

Golden Select™ Artificial Hedge Panels are covered by an 8-year limited residential warranty against manufacturing defects and extreme color fading under normal weather conditions. After a period of time, gradual fading may occur depending on the total exposure to sunlight. Golden Select™ affirms that the enclosed LED lights are covered by a 1-year limited residential warranty against manufacturing defects. Warranty is guaranteed to the original purchaser from the original purchase date and is non-transferable.

The following conditions apply to the warranty and may void the warranty if not followed correctly:

- The artificial hedge panels must be installed according to the instructions provided by the manufacturer for guaranteed performance and appearance.
- The artificial hedge panels must not be used or installed as flooring.
- If filing a warranty claim, it must be submitted within 30 days of the discovery of a manufacturing defect.
- Proof of purchase, such as a bill of sale is mandatory when requesting warranty service.
- The manufacturer reserves the right to designate a representative to inspect the artificial hedge panel in question and remove samples for analysis.
- The warranty covers the replacement material but excludes labor cost and any other secondary costs.

Warranty exclusions include, but are not limited to the following:

- Failure or damages to the product due to high levels of UV exposure.
- Failure or damages to the product such as burns, distortions, or deformations caused by external heat sources (i.e., BBQs or reflections from glass surfaces such as windows).
- Failure or damages caused by plants (or vegetation of any sort) growing directly upon or in contact with any portion of the product (such as sap from trees) or any gardening or landscaping equipment.
- Failure or damages caused by accidents, cuts, vandalism, abuse or other sources not related to the manufacturing of the product.
- Failure or damages caused by corrosive materials or other chemicals.
- Failure or damages to the product due to high pressure or high mineral content water sprays or sprinklers.
- Failure or damages caused by improper installation, maintenance, protection, or repair of the product. This includes damages to the product due to using non-recommended parts and accessories, and/or improper placement of attachment accessories to the product.
- Failure or damages to the product caused by extreme weather conditions such as high wind or sandstorms, a case of force majeure (i.e., fire, flood, natural disasters etc.), or any event that is not caused by the product itself.
- Failure or damages to the product due to commercial applications.
- Failure or damages due to product alteration or electronic components that have been modified by the user.
- Failure or damages to the product caused by not using a voltage-regulated power supply to connect LED products or controls.
- Failure or damages to the product caused by connecting LEDs to the wrong output voltage, improper connection of power supplies, LED products or controls.

In no event shall the manufacturer and/or retailer be liable for any incidental or consequential damages (including but not limited to liability for economic loss, personal injury, property damages and/or any other damages) connected to the use of this product.

For questions regarding installation, please contact our Technical Support Department by email at techsupport@goldenselect.ca or by telephone at 1 800 267 3183. For additional information, please contact our Customer Service Department at techsupport@goldenselect.ca or visit www.goldenselect.ca. For questions about warranty, please contact our Customer Service department at warranty@goldenselect.ca.

